

LED AIRFIELD LIGHTING



Road-holding Position Light

- ELH-RHP-C(L) Road-holding Position Light

Compliance with Standards (current version)

ICAO Annex 14, Volume 1, & Aerodrome Design Manual


KEY FEATURES

- Flashing lights use a highly efficient LED light source. Meet all kinds of use requirements
- Adopt special aviation connector, cable plug is stable and durable, and easy to plug

TECHNICAL DATA

MECHANICS	
Size (Elevated)	276mm×304mm×488.5mm
Range of Elevation Angle	0° ~ 10°
Shining Unit Size	ø185mm
Light Net Weight	8kg
ENVIRONMENTAL	
Operating Temperature	-40℃ ~ +55℃
Storage Temperature	-40℃ ~ +85℃
Wind Loading	> 480km/h
Humidity	0 ~ 100%
Protection Class (Dust/Liquids)	IP54 (IEC 60598-1)
ELECTRICAL	
Power Input	2.8-6.6A _{eff} AC
Light Color	Red
Flashing Rate	Between 30 and 60 per minute
Power Consumption	6.5W
Light Intensity	200cd ≤ I ≤ 800cd
Fail open	Optional

DESIGN

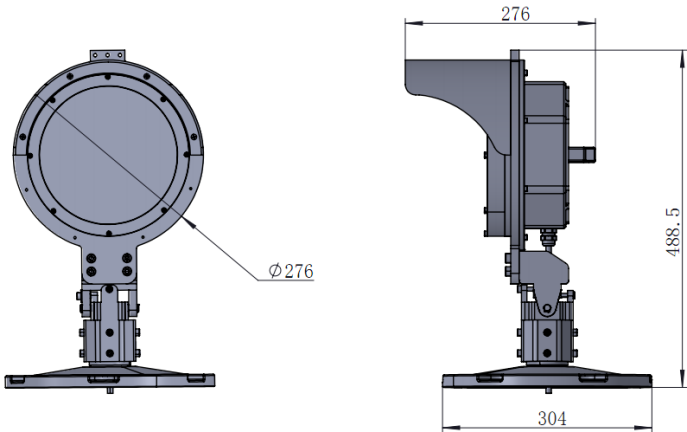

ORDERING CODE

Light Structure

ELH: Elevated Road-holding Position Light

Function / Application

RHP: Road-holding Position Light

Fail Open

FOM: Fail Open Manual-reset

FON: No Fail Open

Power

C: Current (2.8A~6.6A)

Version

Customize: This option is not filled in by default,unless otherwise required

